

500 Gallon Top Seam - 1CP with Dual Grinder Pumps



Item #
500T-1CP-Dual-G

DESIGN NOTES

- Design per performance test per ASTM C1227
- Top surface area 23.4 ft²
- f'c @ 28 days; concrete = 6,000 PSI Min.

Installation:

- Tank to be set on 5" min. sand bed or pea gravel
- Tank to be backfilled uniformly on all sides in lifts less than 24" and mechanically compacted
- Excavated material may be used for backfill, provided large stones are removed
- Excavation should be dewatered and tank filled with water prior to being put in service for installation with water table less than 2' below grade
- Meets C1644-06 for resilient connectors
- Inlet and Outlet identified above pipe
- Delivered complete with internal piping
- Control Panel to be mounted in sight line of tank
- 4' Maximum bury depth

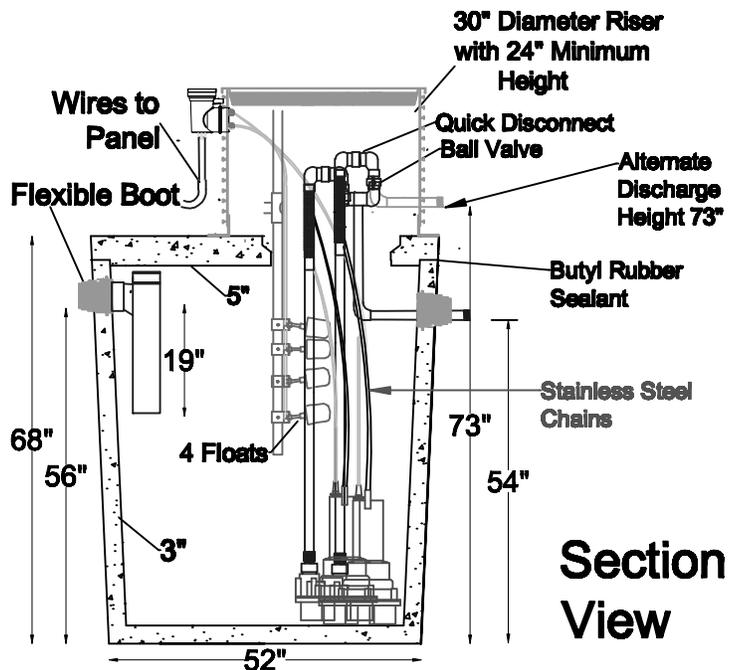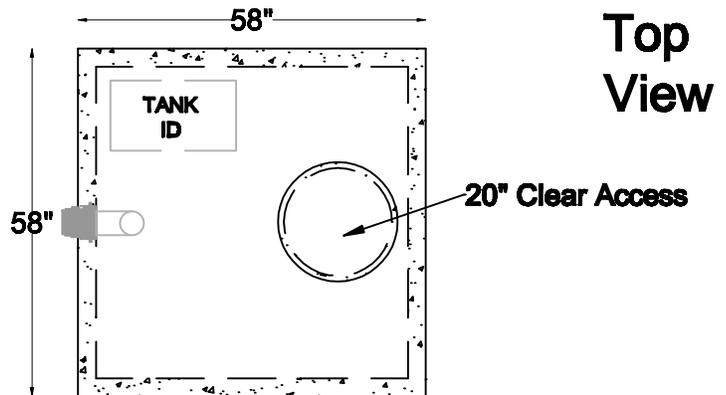

ALLOWABLE BURY (Based on Water Table)	
WATER TABLE	ALLOWABLE EARTH FILL
0' - 0"	3' - 0"
1' - 0"	4' - 0"
2' - 0"	4' - 0"
3' - 0"	4' - 0"
DRY	4' - 0"

Pump:

- Complete installation (wiring, panel, mounting and start-up procedures)
- Complete warranty

Service contracts available for maintenance.

Digging Specs	Invert		Dimensions			Net Capacity	Net Weight		
							Lid	Tank	Total
7' Long x 7' Wide 56" below inlet	Inlet 56"	Outlet 54" or 73"	Length 58"	Width 58"	Min. Hgt. 92"	522 gals	1,340 lbs	4,100 lbs	5,640 lbs

VALLEY PRECAST, Inc.
Buena Vista, Colorado

Phone: 719-395-6764
Fax: 719-395-3727
Website: www.valleyprecast.com
Email: frontdesk@valleyprecast.com