


# 2000 Gallon Top Seam-3CP MicroFast .9 Unit & High Head Pump

Item #  
2000T-3CP-Fast.9-HH

(2500 Gallon Total Volume)

Top View

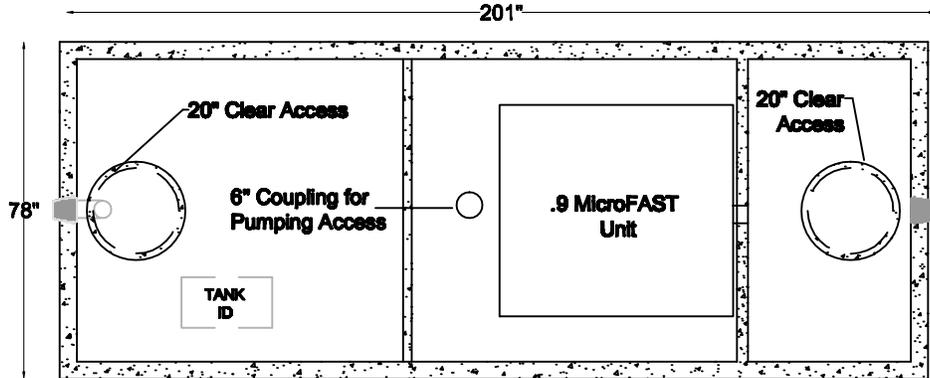


**DESIGN NOTES**

- Design per performance test per ASTM C1227
- Top surface area 108.88 ft<sup>2</sup>
- f'c @ 28 days; concrete = 6,000 PSI Min.

**Installation:**

- Tank to be set on 5" min. sand bed or pea gravel
- Tank to be backfilled uniformly on all sides in lifts less than 24" and mechanically compacted
- Excavated material may be used for backfill, provided large stones are removed
- Excavation should be dewatered and tank filled with water prior to being put in service for installation with water table less than 2' below grade
- Meets C1644-06 for resilient connectors
- Inlet and Outlet identified above pipe
- Delivered complete with internal piping
- Control Panel to be mounted in sight line of tank
- TRUCK MUST BACK UP PERPENDICULAR TO LONG SIDE OF HOLE, LID IS A SECOND SET (NO EXCEPTIONS)
- 4' Maximum bury depth

Risers to Grade

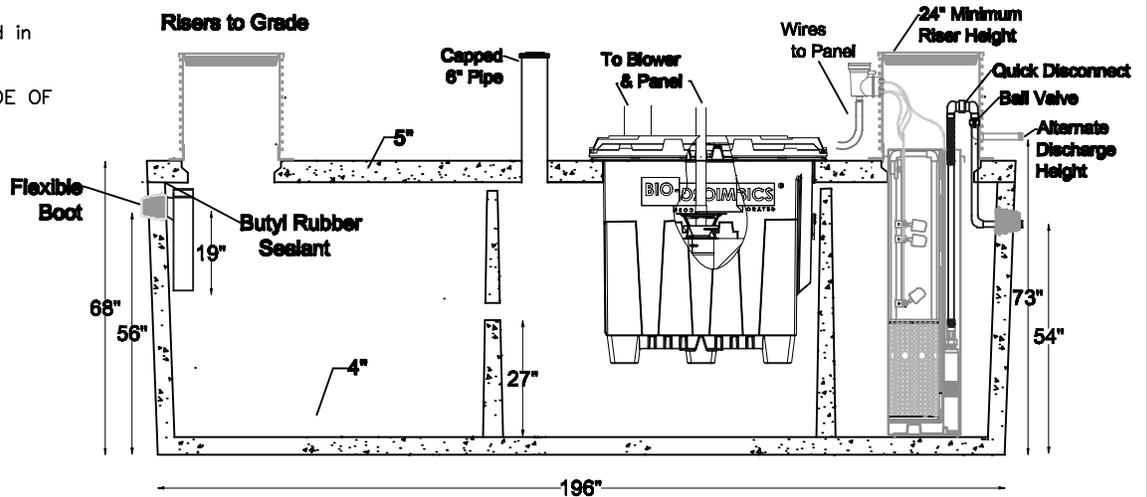

Section View

ALLOWABLE BURY (Based on Water Table)	
WATER TABLE	ALLOWABLE EARTH FILL
0' - 0"	2' - 0"
1' - 0"	3' - 0"
2' - 0"	3' - 0"
3' - 0"	4' - 0"
DRY	4' - 0"



Digging Specs	Invert		Dimensions			Net Capacity				Net Weight		
	Inlet	Outlet	Length	Width	Height	Inlet Side	Middle	Outlet	Total	Lid	Tank	Total
19' Long x 8' Wide	56"	54" or 73"	201"	78"	92"	1050 gal	1050 gal	521 gal	2621 gal	5330 lbs	18690 lbs	24020 lbs



Phone: 719-395-6764  
 Fax: 719-395-3727  
 Website: www.valleyprecast.com  
 Email: frontdesk@valleyprecast.com