


1500 Gallon Grease Interceptor H2O Load Rated

Item #
1500T-GI


Top View

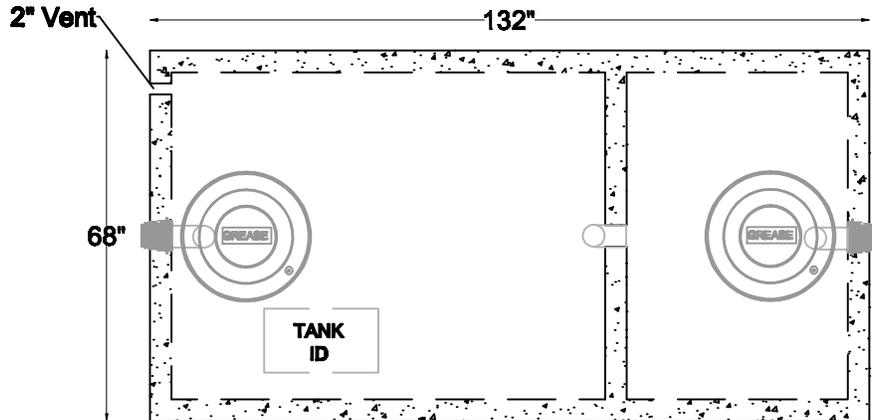

DESIGN NOTES

- Meets ASTM C-1613 spec for Grease Interceptor including the C-1644 for resilient connectors
- Top surface area 62.33 ft²
- f'c @ 28 days; concrete = 6,000 PSI Min.
- Inlet and Outlet identified above pipe
- Delivered complete with internal piping
- Includes Cast Iron Ring and Locking Aluminum Lids stamped "Grease"
- Vents to atmosphere
- 4' Maximum bury depth

ALLOWABLE BURY (Based on Water Table)	
WATER TABLE	ALLOWABLE EARTH FILL
0' - 0"	2' - 0"
1' - 0"	2' - 0"
2' - 0"	3' - 0"
3' - 0"	3' - 0"
DRY	4' - 0"

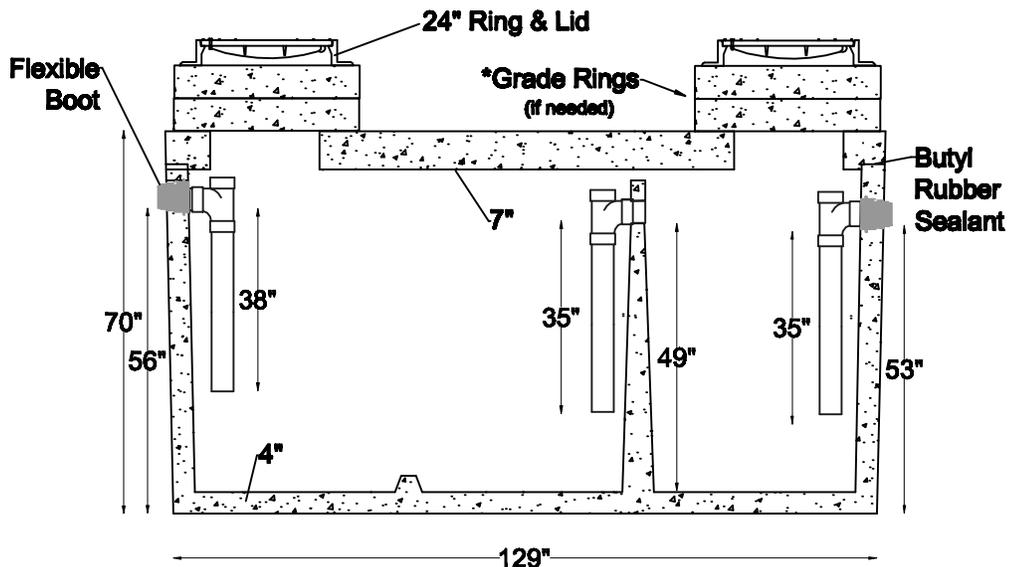

Section View

*Optional concrete grade rings available for an additional charge: 2", 3", 4", 5", 6", or 18"

Benefits:

- More efficient grease removal than kitchen units
- Odor & mess eliminated from kitchen

Digging Specs	Invert		Dimensions			Net Capacity			Net Weight		
	Inlet	Outlet	Length	Width	Height	Inlet Side	Outlet	Total	Lid	Tank	Total
13' Long x 8' Wide											
56" below inlet	56"	53"	132"	68"	70"	1002 gal	503 gal	1505 gal	4860 lbs	11180 lbs	16040 lbs

VALLEY PRECAST, Inc.
Buena Vista, Colorado

Phone: 719-395-6764
Fax: 719-395-3727
Website: www.valleyprecast.com
Email: frontdesk@valleyprecast.com