

# 2500 Gallon Top Seam - 1CP for MicroFast 3.0 Unit

Item #  
2500T-1CP-Fast 3.0



**DESIGN NOTES**

- Design per performance test per ASTM C1227
- Top surface area 108.88 ft<sup>2</sup>
- f'c @ 28 days; concrete = 6,000 PSI Min.

**Installation:**

- Tank to be set on 5" min. sand bed or pea gravel
- Tank to be backfilled uniformly on all sides in lifts less than 24" and mechanically compacted
- Excavated material may be used for backfill, provided large stones are removed
- Excavation should be dewatered and tank filled with water prior to being put in service for installation with water table less than 2' below grade
- Meets C1644-06 for resilient connectors
- Inlet and Outlet identified above pipe
- Delivered complete with internal piping
- TRUCK MUST BACK UP PERPENDICULAR TO LONG SIDE OF HOLE, LID IS A SECOND SET (NO EXCEPTIONS)
- 4' Maximum bury depth

**Top View**

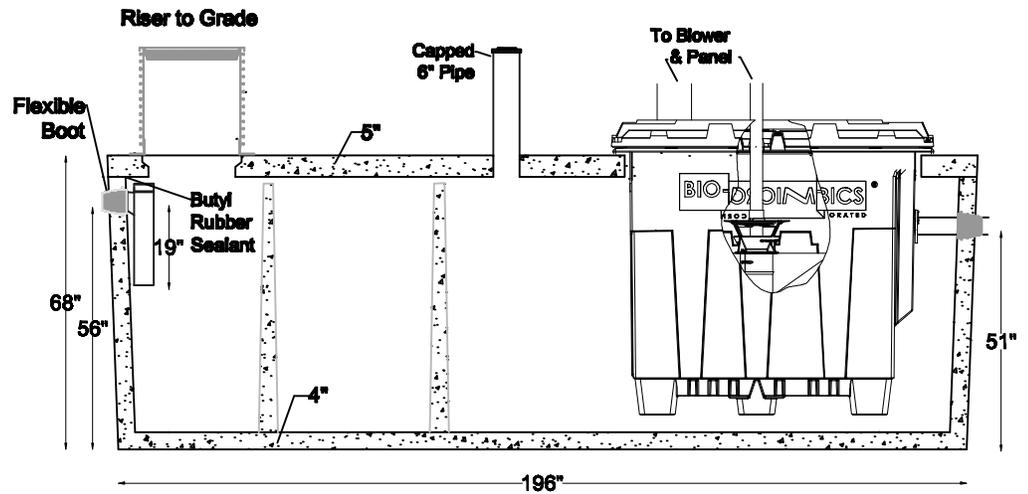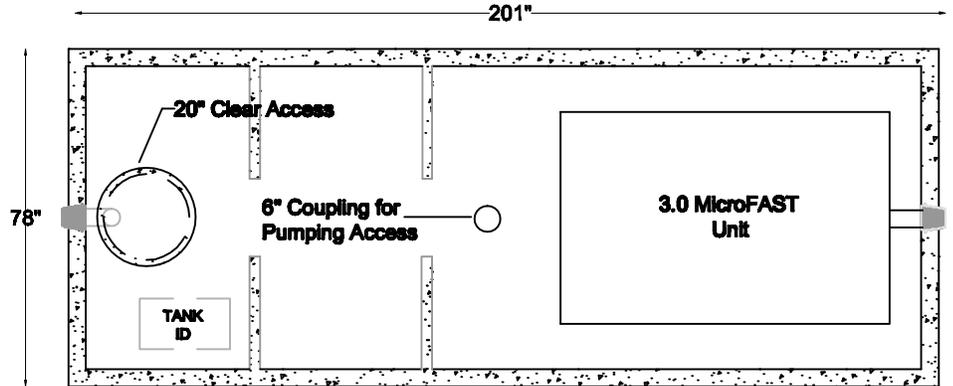

**Section View**

ALLOWABLE BURY (Based on Water Table)	
WATER TABLE	ALLOWABLE EARTH FILL
0' - 0"	2' - 0"
1' - 0"	3' - 0"
2' - 0"	3' - 0"
3' - 0"	4' - 0"
DRY	4' - 0"



Digging Specs	Invert		Dimensions			Net Capacity	Net Weight		
	Inlet	Outlet	Length	Width	Height		Lid	Tank	Total
15' Long x 8' Wide	Inlet 56"	Outlet 51"	Length 201"	Width 78"	Height 92"	2,667 gal	4,890 lbs	18,100 lbs	22,990 lbs



Phone: 719-395-6764  
 Fax: 719-395-3727  
 Website: www.valleyprecast.com  
 Email: frontdesk@valleyprecast.com