

Item #
BRVBULK

Bull™ Run Valve & Key

The Bull Run Valve is available in 4" SCH 40 PVC and is suitable wherever septic disposal systems are used – in commercial, industrial, and residential application.






OPERATING THE VALVE

The direction control handle should be rotated periodically to direct effluent to one or the other of two septic fields. After removing the screw cap at the top of the riser tube, the valve handle can be turned with the valve key furnished.

ADAPTABLE TO VARIOUS PIPES

Each valve port connection is a 4" schedule 40 female slip connection. The riser tube connection is a 4" schedule 40 male slip connection. Use ample PVC, ABS, or multi-purpose glue to form a water-tight joint. Any of the following can be used to connect the valve:

- 1) Schedule 40 PVC or ABS pipe
- 2) Adapter bushing (Dwv Hub to sewer & drain spiget)
- 3) ASTM 2729 (Schedule 30)
- 4) Bell End of ASTM 2729 (Schedule 30) pipe

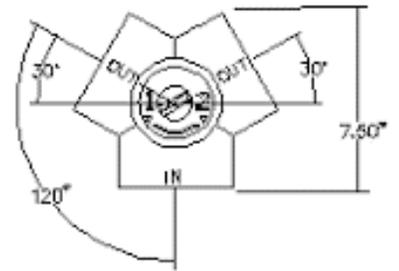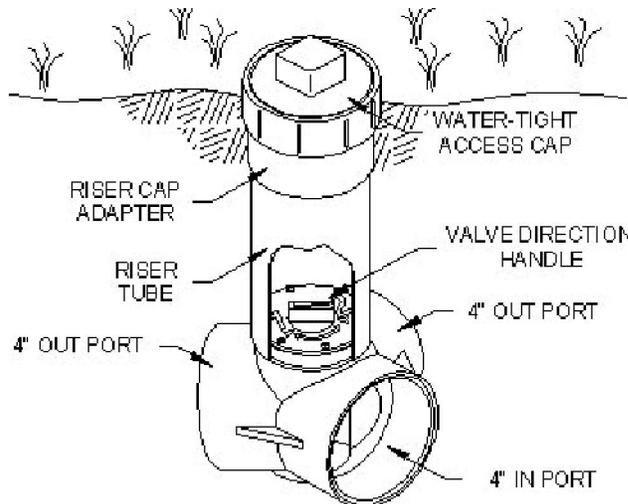

VALLEY
PRECAST, Inc.
Buena Vista, Colorado

Phone: 719-395-6764
Fax: 719-395-3727
Website: www.valleyprecast.com
Email: frontdesk@valleyprecast.com