


2500 Gallon Grease Interceptor H2O Load Rated


Item #
2500T-GI

DESIGN NOTES

- Meets ASTM C-1613 spec for Grease Interceptor including the C-1644 for resilient connectors
- Top surface area 87.75 ft²
- f'c @ 28 days; concrete = 6,000 PSI Min.
- Inlet and Outlet identified above pipe
- Delivered complete with internal piping
- Includes Cast Iron Ring and Locking Aluminum Lids stamped "Grease"
- Vents to atmosphere
- TRUCK MUST BACK UP PERPENDICULAR TO LONG SIDE OF HOLE, LID IS A SECOND SET (NO EXCEPTIONS)
- 4' Maximum bury depth

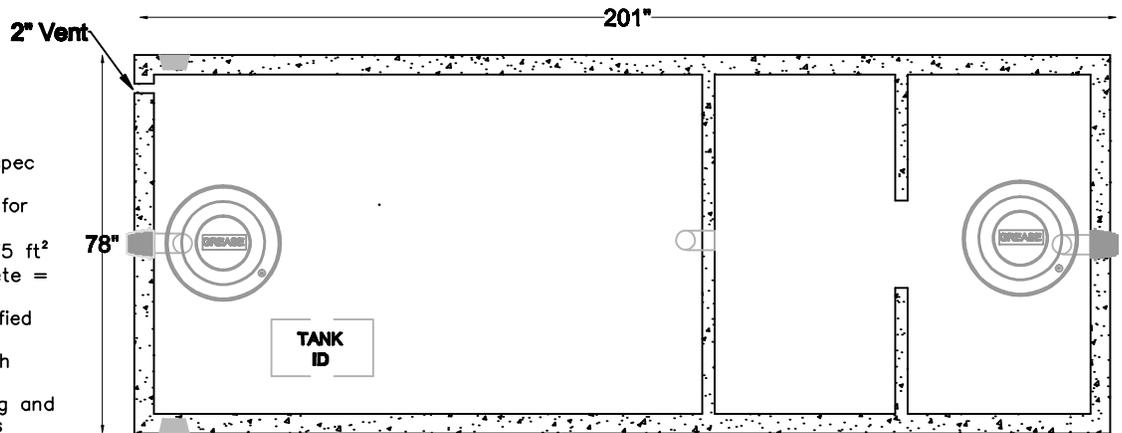

Top View

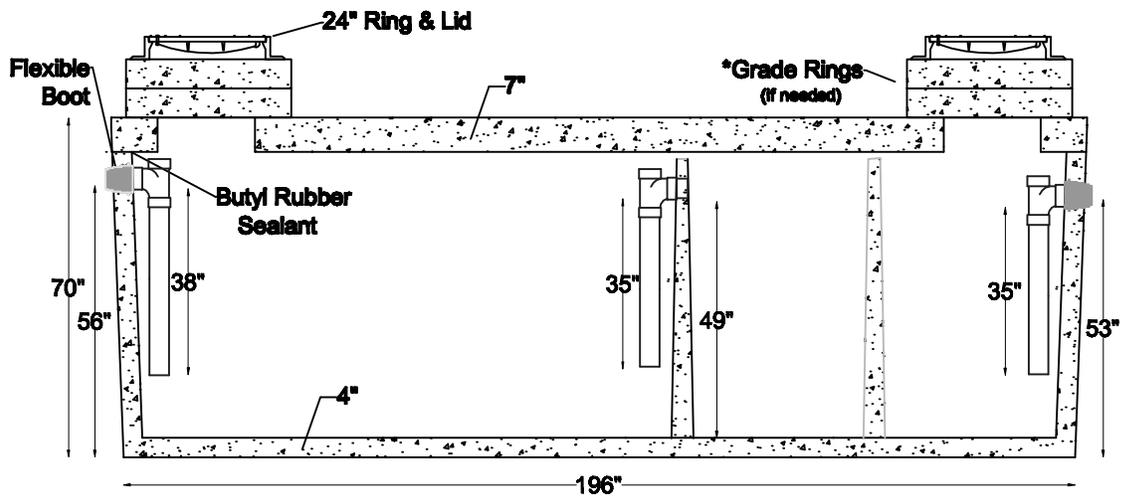

Section View

ALLOWABLE BURY (Based on Water Table)	
WATER TABLE	ALLOWABLE EARTH FILL
0' - 0"	2' - 0"
1' - 0"	2' - 0"
2' - 0"	3' - 0"
3' - 0"	3' - 0"
DRY	4' - 0"

*Optional concrete grade rings available for an additional charge: 2", 3", 4", 5", 6". or 18"

Benefits:

- More efficient grease removal than kitchen units
- Odor & mess eliminated from kitchen

Digging Specs	Invert		Dimensions			Net Capacity			Net Weight		
	Inlet	Outlet	Length	Width	Height	Inlet Side	Outlet	Total	Lid	Tank	Total
19' Long x 8' Wide	56"	53"	201"	78"	70"	1583 gal	1053 gal	2636 gal	8990 lbs	18200 lbs	27190 lbs



Phone: 719-395-6764
Fax: 719-395-3727
Website: www.valleyprecast.com
Email: frontdesk@valleyprecast.com