



60" Manhole Products

Grade Adjustment Rings




- ASTM C-478
- Steps, blockouts, coatings and boot options available
- Different options and configurations available
- 6000 psi concrete
- Reinforced with welded wire
- Precast grout inverts available upon request


Flat Top




Flat Lid



Riser Sections

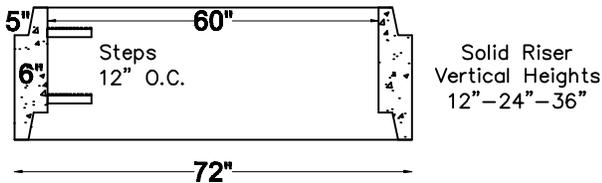

Base Sections

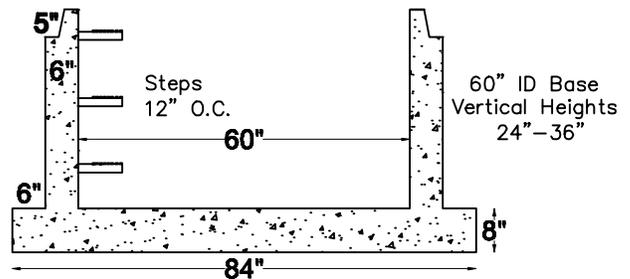

60" ID Manhole Technical Sheet

Type	Wall Thickness	Thickness	O.D.	Weight #	Steel	Gallons/Ft.
Flat Top		12"	72"	3000	(2) layers .12 in. ² grid	
12" SR	6"		72"	1300	(2) .25 in. hoops	148
24" SR	6"		72"	2600	(2) .25 in. hoops	
36" SR	6"		72"	3900	(3) .25 in. hoops	
24" Base	6"	8" Base	72"/84"	6238	(2) layers .12 in. ² grid	
36" Base	6"	8" Base	72"/84"	7538	(2) layers .12 in. ² grid	