


GeoFlow for Cold Climate Installations

GEOFLOW DRIP SYSTEM RECOMMENDATIONS FOR COLD CLIMATE INSTALLATIONS



1. ALL INSULATION TO BE HI-DENSITY POLYSTYRENE, BURIAL TYPE RIGID INSULATION.
2. SUPPLY AND RETURN MANIFOLDS ARE TO BE INSTALLED SUCH THAT THEY DRAIN TO THE PUMP SYSTEM AFTER EACH DOSE.
3. INSTALL SUPPLY AND RETURN MANIFOLDS A MINIMUM OF 18" DEEP, OR INSULATE. SLOPE TO DRAIN BACK TO HEADWORKS BOX.
4. FOLLOW ALL OTHER "WINTERIZATION" RECOMMENDATIONS IN THE GEOFLOW DESIGN, INSTALLATION AND MAINTENANCE GUIDELINES.
5. THE GEOFLOW DRIP TUBING IS TO BE INSTALLED AT A DEPTH OF 12-18 INCHES BELOW FINAL GRADE.
6. INSTALLATIONS IN THE SPRING AND SUMMER ARE PREFERABLE TO ALLOW FOR REVEGETATION PRIOR TO WINTER. VEGETATIVE COVER AIDS IN THE INSULATION OF THE DRIP SYSTEM. FOR SYSTEMS INSTALLED IN THE FALL OR WINTER, THE DRIP FIELD AREA SHOULD BE COVERED WITH A 4-6 INCH LAYER OF MULCH MATERIAL.

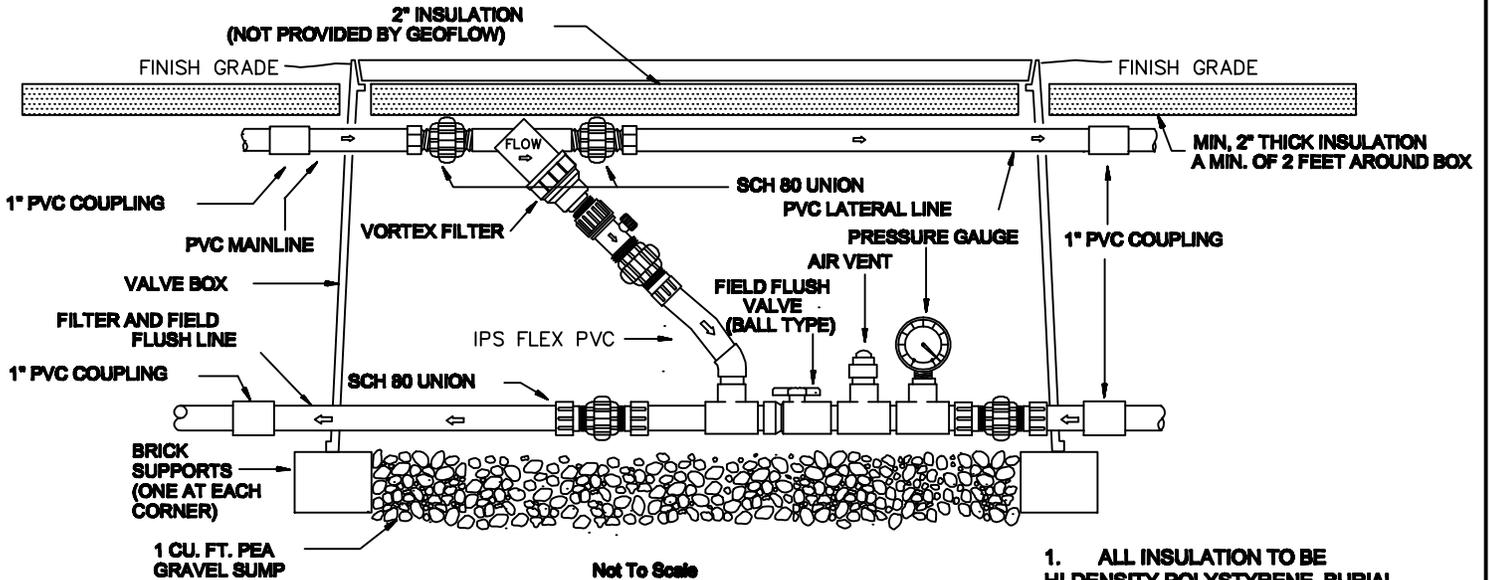