



Rail Truck Capacities

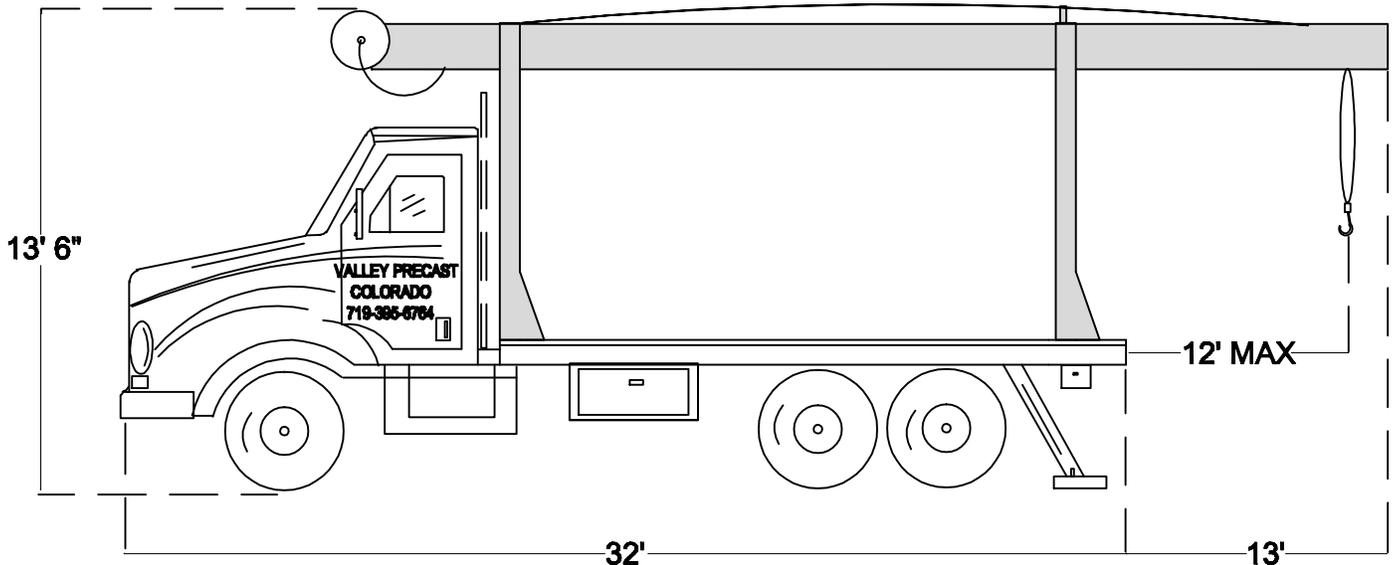

All capacities are approximate and based on solid truck set. Capacities drop very quickly if not on solid stable soil. Trucks need AT LEAST 10 feet of level ground to stabilize outriggers for tank placement.

21,500 lbs. maximum load capacity (on solid level ground)

12 ft. maximum extension from back of rail trucks

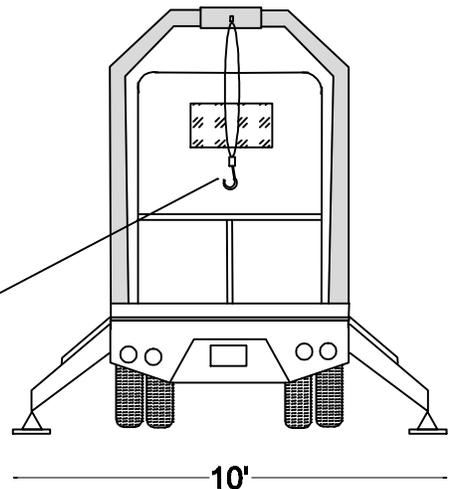

Safety of people, equipment and products are our first priority. Our drivers will assess each job site on arrival for safety and access to the tank hole. Our driver will have final say on position and entry for the truck. We will not take risks to place products. The excavation should be prepared for easy placement. If you have questions regarding access, we should discuss this ahead of time.

**VALLEY
PRECAST, Inc.**
Buena Vista, Colorado

Phone: 719-395-6764
Fax: 719-395-3727
Website: www.valleyprecast.com
Email: frontdesk@valleyprecast.com