


# Double Walled PVC Riser & Lid Options


## Poly Lid

(Static load tested to 5000 lbs)

- Skid resistance surface
- Available in green
- Highest level of UV Protection included
- Includes a foam gasket for airtight and watertight applications
- Includes square drive screws to discourage unauthorized entry
- Insulation panels achieve R-10 insulation rating



2" of Insulation  
Standard

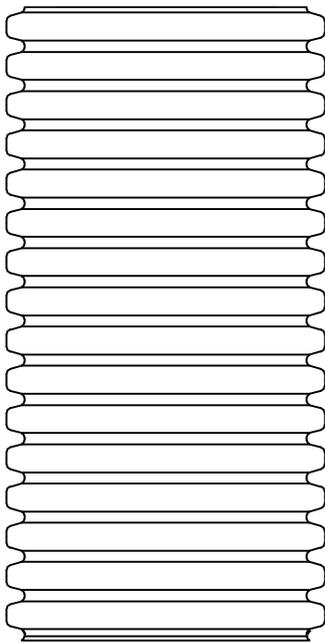

## Double Walled PVC Riser

- Available in 24" and 30" Diameter
- Cut to length
- Sold in +/- 2" increments
- Must be cut between ribs

## Orengo ® DuraFiber™ Access Lids (FLD)

Not recommended for vehicular traffic

24" and 30" Diameters

- Solid, resin-infused fiberglass construction
- 20,000-lb breaking strength
- Standard green or brown colors
- Available with or without urethane lid gasket
- Available with carbon filtration
- 4 stainless steel flathead socket cap screws & hex key wrench
- Insulated lids available - 2" or 4"



2" of Insulation

